



2019 MODEL YEAR SPECIFICATIONS

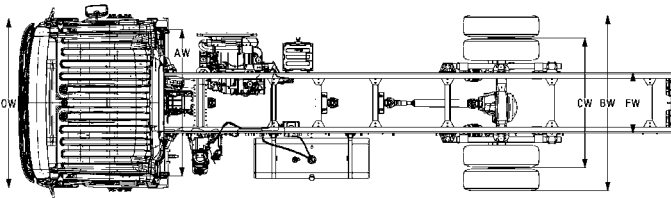

Wheelbase (in.)	Cab to Axle (CA-in.)	Cab to End of Frame (CE-in.)	Back of Cab (BOC-in.)	Overall Length (OAL-in.)	Body Lengths (ft.)	Overall Width (OW-in.)	Axle Width (AW-in.)	Overall Height (OH-in.)
152	127.0	192.9	3.0	274.4	14-16	93.5	81.1	112
170	145.0	220.0	3.0	301.5	18	93.5	81.1	112
188	163.0	247.0	3.0	328.5	20	93.5	81.1	112
200	175.0	264.9	3.0	346.4	22	93.5	81.1	112
212	187.0	283.1	3.0	364.6	24	93.5	81.1	112
224	199.0	301.0	3.0	382.5	26	93.5	81.1	112
236	211.0	319.1	3.0	400.6	28	93.5	81.1	112
248	223.0	337.0	3.0	418.5	30	93.5	81.1	112

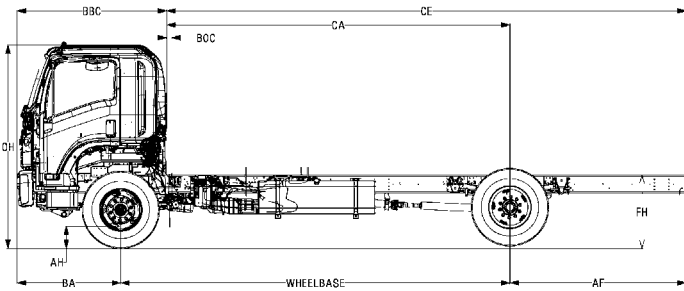

GVWR/GCWR 25,950/30,000 lbs.

BODY/PAYLOAD ALLOWANCE 14,641-15,690 lbs.

GAWR
Front 12,000 lbs.
Rear 19,000 lbs.

FRONT AXLE CAPACITY 12,000 lbs.

REAR AXLE CAPACITY 19,000 lbs.
Ratio 6.17

SUSPENSION F/R SPRINGS Tapered/Multi-Leaf
Capacity 12,000/21,000 lbs.

SERVICE BRAKES Full Air Dual Circuit with ABS
Front/Rear S-CAM Drum Automatic Adjust

EXHAUST BRAKE Standard

TRANSMISSION Allison 2550 RDS 6-speed Automatic

ENGINE Isuzu 4HK1-TC turbocharged intercooled diesel

Displacement 5.2L (317 in.³)
Engine Power 215 hp @ 2,500 rpm
Engine Torque 520 lb.-ft. @ 1,600 rpm

Oil Level Indicator Dash-mounted oil level check switch and light

ALTERNATOR 140-amp

BATTERIES 2 Maintenance-Free Group 31 750-CCA

TIRES LRR (Low Rolling Resistance) 11R22.5 (14-pr) Standard

STEERING Integral Hydraulic Power

STEERING COLUMN Tilt and Telescopic

FUEL TANK 50 or 100 Gal. LH side mount based on wheelbase

FUEL/WATER SEPARATOR Dual fuel filter with dash mounted indicator light