NPR-HD GAS CREW CAB





GVWR/GCWR

BODY/PAYLOAD ALLOWANCE

GAWR Front Rear

FRONT AXLE CAPACITY

REAR AXLE CAPACITY

SUSPENSION F/R SPRINGS

FRAME Section Modulus Resistance Bending Moment

SERVICE BRAKES

TRANSMISSION

ENGINE

Displacement Engine Power Engine Torque

LIMITED SLIP DIFFERENTIAL

ALTERNATOR

BATTERIES

TIRES LRR (Low Rolling Resistance)

STEERING

STEERING COLUMN

FUEL TANK

Standard

14,500/20,500 lbs.

8,442 - 8,503 lbs.

6,630 lbs. 11,020 lbs.

6,830 lbs.

11,020 lbs.

4.300

Tapered/Multi-Leaf 8,440/12,900 lbs.

7.20 in.³ 316,800 lb.-in.

Vacuum/Hydraulic with 4-Channel ABS Disc/Drum

6L90 6-speed auto. with double overdrive and

lock-up converter

GMPT L96 (Gen IV) V8 Vortec 6000 (Optional: KL8 - Alternative Fuel Capable Engine)

6.0L (365 in.³) 297 hp @ 4,300 rpm 372 lb.-ft. @ 4,000 rpm

Optional

145-amp

1 Maintenance-Free 750-CCA

225/70R19.5F/G (12/14-pr) Standard

Integral Hydraulic Power

Tilt and Telescopic

30 gal. in-frame















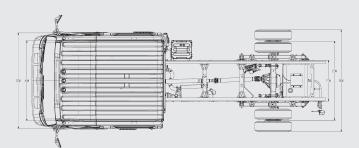



NPR-HD GAS CREW CAB								
Wheelbase (in) Cab to	Cab to End	Back of	Overall	Overall	Axle	Overall	Body
	Axle (in.)	of Frame (in.)	Cab (in.)	Length (in.)	Width (in.)	Width (in.)	Height (in.)	Length (ft.)
150.0	88.5	131.6	5.0	241.5	81.3	65.6	91.1	12
176.0	114.5	157.6	5.0	267.5	81.3	65.6	91.1	16