


FTR

**25,950 LBS. GVWR
CLASS 6**




WEIGHTS AND MEASURES

Wheelbase (in.)	Curb Weight (lbs.)		Payload (lbs.)		Recommended Body Length (ft.)
	Min	Max	Min	Max	
152	9,686	10,243	15,707	16,264	14-16
170	9,764	10,321	15,629	16,186	18
188	9,947	10,625	15,325	16,003	20
200	10,191	10,869	15,081	15,759	22
212	10,280	10,958	14,993	15,671	24
224	10,524	11,202	14,749	15,427	26
236	10,767	11,324	14,627	15,184	28
248	10,888	11,445	14,505	15,062	30

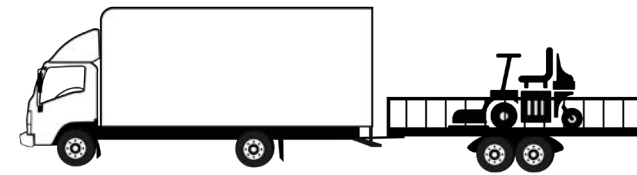


30,000 lbs. GCWR
TRUCK WEIGHT & TRAILER WEIGHT



14,505 to 16,264 LBS.
BODY PAYLOAD



TIRES
11R22.5 (14-pr) or
255/70R22.5 (16-pr) Low Pro




**FULL AIR DUAL CIRCUIT BRAKES
WITH ABS AND S-CAM DRUM**

Front Drum 16.5-in. Rear Drum 16.5-in.



CUMMINS
B6.7L DIESEL ENGINE
260 HP @ 2400 RPM
660 LB-FT @ 1600 RPM



**6-SPEED AUTOMATIC
ALLISON® 2550 RDS TRANSMISSION
INCLUDES PARK PAWL**



50 or 100-GALLON FUEL TANK

FVR
DE-RATED

25,950 LBS. GVWR
CLASS 6




WEIGHTS AND MEASURES

Wheelbase (in.)	Curb Weight (lbs.)		Payload (lbs.)		Recommended Body Length (ft.)
	Min	Max	Min	Max	
152	10,011	10,343	15,607	15,939	14-16
170	10,089	10,421	15,529	15,861	18
188	10,605	10,937	15,014	15,346	20
200	10,726	11,058	14,893	15,225	22
212	10,849	11,181	14,770	15,102	24
224	10,970	11,302	14,649	14,981	26
236	11,092	11,424	14,527	14,859	28
248	11,213	11,545	14,405	14,737	30




33,000 lbs. GCWR
TRUCK WEIGHT & TRAILER WEIGHT



14,405 to 15,939 LBS.
BODY PAYLOAD



TIRES
11R22.5 (14-pr)




FULL AIR DUAL CIRCUIT BRAKES WITH ABS AND S-CAM DRUM

Front Drum 16.5-in. Rear Drum 16.5-in.



CUMMINS
B6.7L DIESEL ENGINE
260 HP @ 2400 RPM
660 LB-FT @ 1600 RPM




6-SPEED AUTOMATIC ALLISON® 2500 RDS TRANSMISSION



50 or 100-GALLON FUEL TANK




CUMMINS
B6.7L DIESEL ENGINE
260 HP @ 2400 RPM
660 LB-FT @ 1600 RPM



6-SPEED AUTOMATIC
ALLISON® 2500 RDS TRANSMISSION



50 or 100-GALLON FUEL TANK

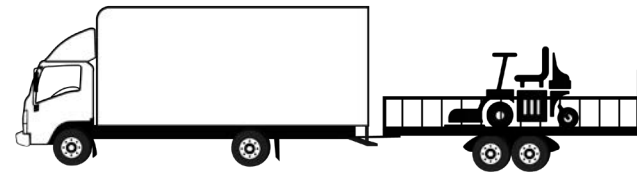

33,000 lbs. GCWR
TRUCK WEIGHT & TRAILER WEIGHT




21,455
to
22,989
LBS.

BODY PAYLOAD



TIRES
11R22.5 (14-pr)



FULL AIR DUAL CIRCUIT BRAKES
WITH ABS AND S-CAM DRUM

Front Drum
16.5-in.

Rear Drum
16.5-in.



WEIGHTS AND MEASURES

Wheelbase (in.)	Curb Weight (lbs.)		Payload (lbs.)		Recommended Body Length (ft.)
	Min	Max	Min	Max	
152	10,011	10,343	22,657	22,989	14
170	10,089	10,421	22,579	22,911	16-18
188	10,605	10,937	22,064	22,396	18-20
200	10,726	11,058	21,943	22,275	20-22
212	10,849	11,181	21,820	22,152	22
224	10,970	11,302	21,699	22,031	22-24
236	11,092	11,424	21,577	21,909	24-26
248	11,213	11,545	21,455	21,787	26-30